


Specification

Model Name : AC 0348A

Input Voltage	115 / 230Vac [AUTO SW.]
Input Frequency	47 ~ 63Hz
Max. In-rush Current	Cold start , 30A for 115Vac , 60A for 230Vac
Input Current	2A Max for 115Vac 1A Max for 230Vac
Output Voltage	58.4Vdc \pm 0.2V (Absorption Charge) 54.8Vdc \pm 0.2V (Float Charge)
Start Point of Floating	0.5A \pm 0.2A
Max. Charging Current	3A
Ripple / Noise	200mVp-p
FAN Control	Fan on fast speed (Bulk / Absorption Charge) Fan on slow speed (Float Charge)
LED Indication	LED1 : Red \rightarrow Power on LED2 : Orange \rightarrow Charging Green \rightarrow Full charged
Dimension	175.5 x 88 x 47 mm
G.W.	0.8 Kgs

Charge Curve :

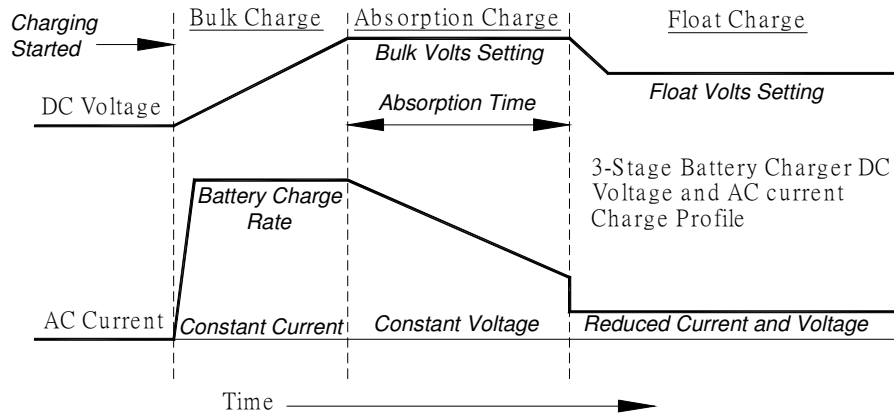

Body View



Front Panel



Rear Panel



BATTERY CHARGER AC04XXXA SERIAL OUTLINE

